

INVERTER Wall Mounted

Wireless R.C.

For ASHG07/09LU

For ASHG12/14LU

CLASS ALL
A **DC**

ASHG07LU **NEW**

CLASS ALL
A **DC**

ASHG09LU **NEW**

CLASS ALL
A **DC**

ASHG12LU **NEW**

CLASS ALL
A **DC**


ASHG14LU **NEW**

Thin & Slim design

Thin and slim design is realized by Ø5mm heat exchanger and high efficiency wind blower.



H282 X W870 X D185

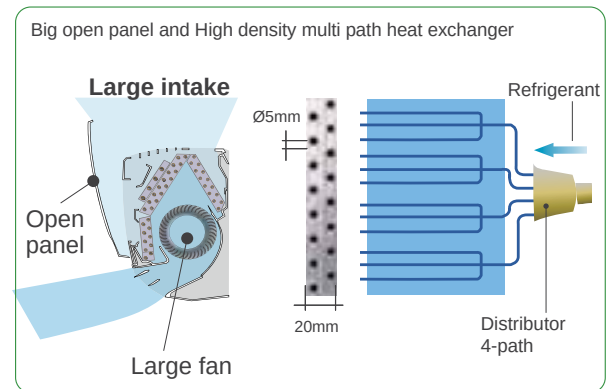

Specifications

Model No.	Indoor unit		ASHG07LU	ASHG09LU	ASHG12LU	ASHG14LU
	Outdoor unit		AOHG07LU	AOHG09LU	AOHG12LU	AOHG14LU
Power Source		V/Ø/Hz	230/1/50	230/1/50	230/1/50	230/1/50
Capacity	Cooling	kW	2.0(0.5~3.0)	2.5(0.5~3.2)	3.5(0.9~4.0)	4.2(0.9~5.0)
	Heating		3.0(0.5~4.0)	3.2(0.5~4.2)	4.0(0.9~5.6)	5.4(0.9~6.0)
Input Power	Cooling/Heating	kW	0.460/0.660	0.555/0.680	0.905/0.930	1.235/1.380
EER - Energy Class	Cooling	W/W	4.35-A	4.50-A	3.87-A	3.40-A
COP - Energy Class	Heating		4.55-A	4.71-A	4.30-A	3.91-A
Running Current	Cooling/Heating	A	2.6/3.4	3.1/3.4	4.6/4.7	5.8/6.3
Moisture Removal		l/h	1.0	1.3	1.8	2.1
Noise (Indoor)	Cooling	dB(A)	38/35/31/21	42/36/32/21	43/37/32/21	45/40/33/25
Noise (Outdoor)	Cooling		46	48	50	50
Airflow Rate (High)	Indoor / Outdoor	m³/h	680/1,720	800/1,720	850/1,940	900/1,940
Net Dimension H x W x D	Indoor	mm	282x870x185	282x870x185	282x870x185	282x870x185
		kg(lbs)	9.5(21)	9.5(21)	9.5(21)	9.5(21)
	Outdoor	mm	540x660x290	540x660x290	540x790x290	540x790x290
		kg(lbs)	23(51)	25(55)	33(73)	34(75)
Piping Connections (Small / Large)		mm	6.35/9.52	6.35/9.52	6.35/9.52	6.35/12.7
Drain Pipe Diameter (Inner/Outer)		mm	16/29	16/29	16/29	16/29
Max Pipe Length (Pre-Charge)		m	20(15)	20(15)	20(15)	20(15)
Max Height Difference		m	15	15	15	15
Operation Range	Cooling	°CDB	-10~43	-10~43	-10~43	-10~43
	Heating		-15~24	-15~24	-15~24	-15~24
Refrigerant			R410A	R410A	R410A	R410A